


D4




Key Features

- Internal YUV4:4:4 processing
- 12 Bit processing
- HDMI 2.0 compatible
- HDCP 2.X compliance
- DisplayPort 1.2 compatible
- Support for HDR
- 12G/6G/3G/HD/SD SDI input compatible
- Support for 8K1K native input and output
- 4K@60 outputs including HDMI 2.0, DisplayPort 1.2, 12G SDI
- EDID management
- Up to 8K2K output splicing
- Multiple operation mode
- 90° and 270° rotation
- Optional DVI outputs supports AOI splicing

Application

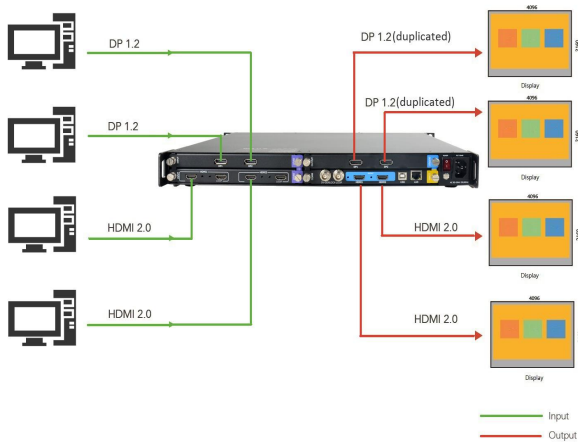

Dimensions

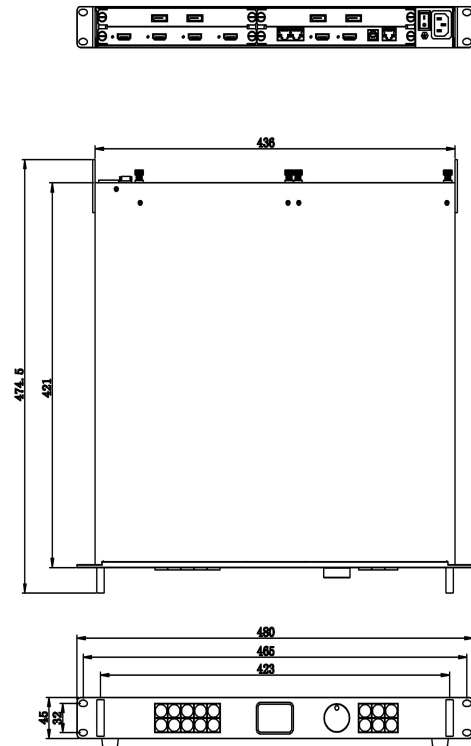

Order Codes

Product Code	Item
120-0004-01-0	D4
191-0004-01-0	Dual DP 1.2 Input Module
191-0004-02-0	Dual HDMI 2.0 Input Module
191-0004-03-0	Dual 3G SDI Input Module
191-0004-04-0	Dual 12G SDI Input Module
191-0004-21-1	Dual DP 1.2 Output Module
191-0004-22-0	Dual 12G SDI Output Module
191-0004-23-0	Quad DVI Output Module

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink[®]
 www.rgblink.com



Specification

Connectors	Input	2 slots up to 4 inputs, <i>select from</i>	4K HDMI Module DP 1.2 Module 3G SDI Module 12G SDI Module	4 × HDMI-A (2 In 2 Loop) 2 × DisplayPort 4 × BNC (2 In 2 Loop) 4 × BNC (2 In 2 Loop)
	Output	Standard with <i>Select from</i>	HDMI 2.0 DP 1.2 Module 12G SDI Module DVI Module	2 × HDMI-A 2 × DisplayPort 2 × BNC 4 × DVI
	Communication		Genlock LAN Serial USB In	2 × BNC 1 × RJ45 1 × USB-B
	Power			1 × IEC
Performance	Input Resolutions	12G SDI SMPTE DP 1.2 VESA HDMI 2.0 SMPTE VESA	480i 576i 720p@25/30/50/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@30/50/60 800×600@60 1024×768@60 1280×720@60 1280×800@60 1366×768@60 1400×1050@60 1600×1200@60 1920×1080@60 1920×1200@60 2560×1600@60 3840×2160@23.98/24/25/29.97/30/50/60 720p@25/30/50/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@30/50/60 800×600@60 1024×768@60 1280×768@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1400×900@60 1600×1050@60 1600×1200@60 1680×1050@60 1920×1080@60 1920×1200@60 2048×1152@60 2560×812@60 2560×816@60 2560×1600@60 3840×1080@60 3840×2160@23.98/24/25/29.97/30/50/60 4096×2160@50/60 7680×1080@60	
	Output Resolutions	DP 1.2 VESA HDMI 2.0 SMPTE VESA 12G SDI SMPTE DVI SMPTE VESA	800×600@60 1024×768@60 1280×720@60 1280×800@60 1366×768@60 1400×1050@60 1600×1200@60 1920×1080@60 2048×1152@60 2560×812@60 2560×816@60 2560×1600@60 3840×1080@60 3840×2160@23.98/24/25/29.97/30/50/60 <i>customized resolution</i> 720p@25/30/50/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@30/50/60 800×600@60 1024×768@60 1280×768@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1400×900@60 1600×1050@60 1600×1200@60 1680×1050@60 1920×1080@23.98/24/25/29.97/30/50/59.94/60 1920×1200@60 2048×1152@60 2560×812@60 2560×816@60 2560×1600@60 3840×1080@60 3840×2160@23.98/24/25/29.97/30/50/60 4096×2160@50/60 7680×1080@60 <i>customized resolution</i> 720p@25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 1024×768@60 1280×720@50/59.94/60 1280×768@60 1280×960@60 1280×1024@60 1280×1280@60 1360×768@60 1366×768@60 1400×1050@60 1400×900@60 1680×1050@60 1920×1080@50/59.94/60	
	Supported Standard	SDI DisplayPort HDMI DVI	SMPTE ST 2082-1, SMPTE ST 2081-1, SMPTE ST 424, SMPTE ST 292-1, SMPTE ST 259, DVB-ASI,MADI 1.2 2.0 Single Link	
	Grey Level	12 bit		
	Color Space	4:4:4		
Features	Splicing	8K2K		
	Effects	Noise Reduction Deinterlace Sharpness Gamma		
	Audio	Supported for embedded audio		
	Invert/Mirror	Yes		
	EDID Management	Yes		
Power	Input	AC 90-264VAC, 50/60Hz		
	Max Power	100W		
Environment	Temperature	0°C ~ 40°C		
	Humidity	10%~85%		
Physical	Weight	Net 7.2kg Package 8.5kg		
	Dimension	Net 480mm×474mm×45mm Package 530mm×530mm×130mm		