



HD Product Specifications

Led control cardHD-U6BN

V2.0 20171116

Overview

For signage, store, outdoor advertising and other information display, HUIDU technology launched our U-disk series control card, for updates the display programs by the USB port.

U6BN is a U-disk series control card, through the USB port to update the program. Cost-effective, simple software to operate, better and rich display effect, supported variety of monochrome display.


Application software: HD2016.

Features


| Content | Parameters |
|-----------------------------|---|
| Support module | Single color, Various conventional scanning methods |
| Control range Resolution | Single color: 1024W*48H Dual color: 512W*48H Tricolor: 512W*24H |
| FLASH Capacity | 4M Byte |
| Communication Port | U-Disk |
| HUB signal | 3HUB12,1HUB08 |
| Program Quantity | 1000pcs Programs. also can change program by button or remote if weld sensor (Remoter can select 1-999 Programs) |
| Area Quantity | 20 areas with separate zone, separated special effects and border |
| Display Showing | Text, Hypertext (GIF、 Picture、 Animation Character、 SWF、 Video),Excel, Time, Count, Digital, Temperature, Humidity, Brightness ,Background etc |
| display effects | 1.Support all languages(Software :HD2016) 2.Support 7 color effects and Gray level (HD-U62/U63/U64) 3. Border functions of Program border, area border and Custom |

| | |
|-------------------------|--|
| | <p>design border.</p> <p>4.Add Countdown /Count up, Button Countdown / Count up</p> <p>5.Add Text Rotation of 90° 、 180° 、 270° for display</p> <p>Text function of Hollow、 Stroke etc</p> <p>6.Add payment collection function</p> <p>7.Updated program by U-disk</p> <p>8. More than 200 types showing effects</p> |
| Clock function | <p>1、 Support calendar, analog clock, lunar calendar</p> <p>2, is timing, countdown display</p> <p>3, display font, size, location, etc. can be arbitrarily set</p> <p>4, support for multiple time zone display</p> |
| Extended Equipment | Brightness setting by Custom、 Automatic(weld sensor)、 by time period regulation |
| Automatic switch screen | Support on /off display automatically by time |
| Dimming | Support two brightness adjustment mode |


Port Definition

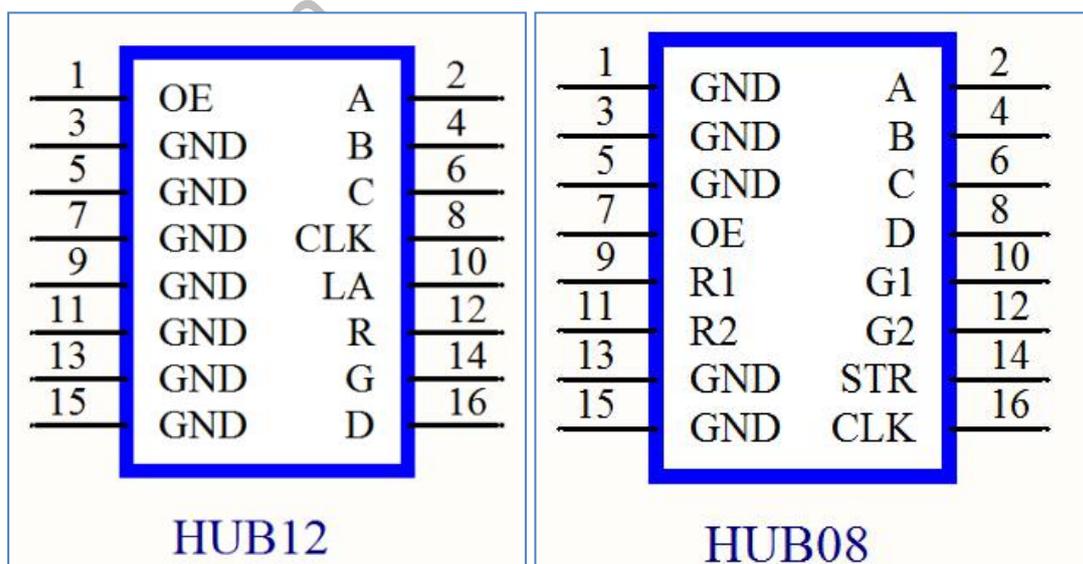

Setup Diagram

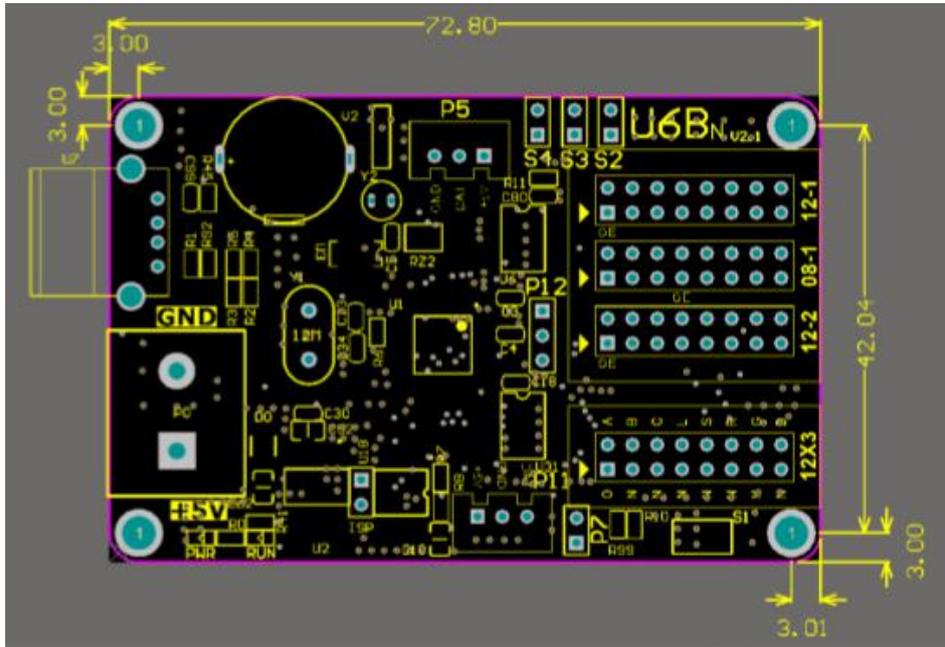

HD-U6BN Photo

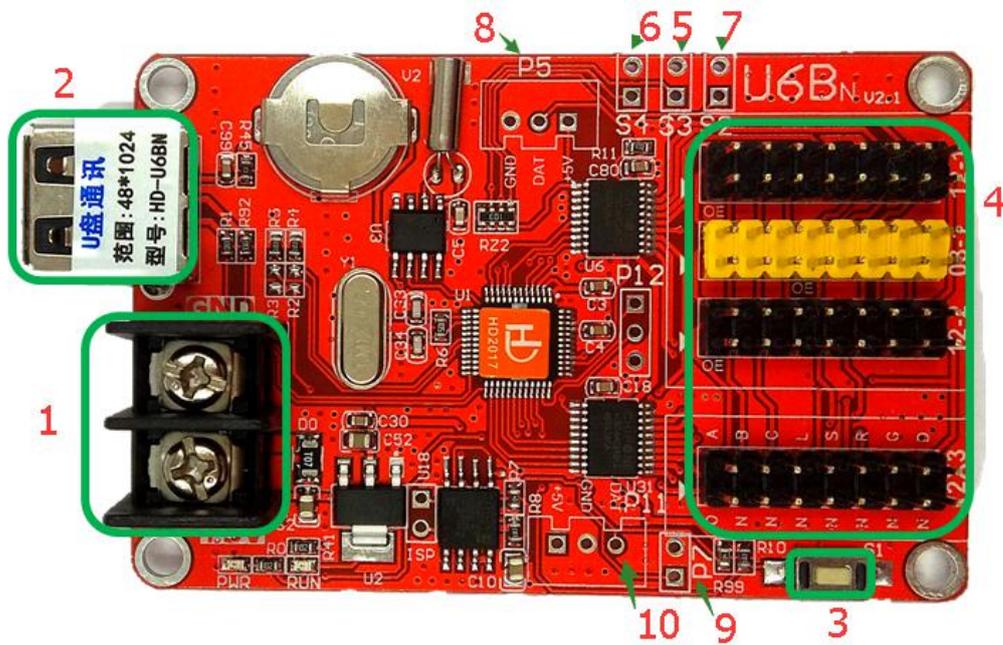

- ①: Power connector, connect 5V power supply;
- ②: USB ports, Updated program by U-disk;
- ③: Test button, click to switch screen test status;

- ④ : 3 HUB12,1HUB08 connect the display;
- ⑤ : S3, connect the point switch, switch the previous program, timer reset, count down;
- ⑥ : S4, connect the point switch, program control, time-out, count reset;
- ⑦ : S2, connect the point switch, switch the next program, the timer starts, count plus;
- ⑧ : P5, connect temperature / humidity sensor;
- ⑨ : P7, connect the brightness sensor;
- ⑩ : P11, connected to the infrared receiver, with the remote control.

Technical Parameters

| | Minimum | Typical value | Maximum |
|--------------------------------|---------|---------------|---------|
| Rated voltage (V) | 4.2 | 5.0 | 5.5 |
| Storage temperature(°C) | -40 | 25 | 105 |
| Work environment humidity (°C) | -40 | 25 | 80 |
| Work environment humidity (%) | 0.0 | 30 | 95 |

Precautions

- 1) To ensure that the control card is stored during normal operation, make sure the battery on the control card is not loose;
- 2) In order to ensure the long-term stable operation of the system, please try to use the standard 5V power supply voltage.