


X3






Key Features

- Support for HDR
- Modular Design throughout for input and output
- Hot swap input and output modules
- 4K@60 inputs compatible including HDMI 2.0, DisplayPort1.2
- Up to 12G-SDI Input option
- 4K/2K EDID Management
- Multiple operation modes
- Support for 3D signal
- Control via XPOSE and T series consoles
- Redundant hot swap PSU option

Application

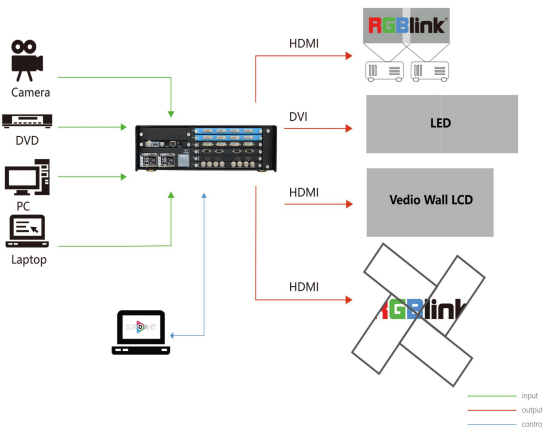

Dimensions

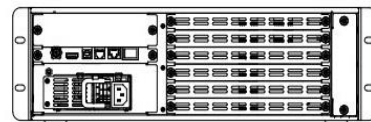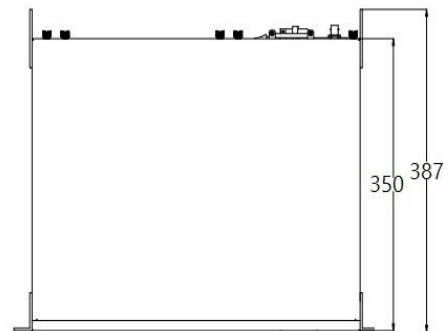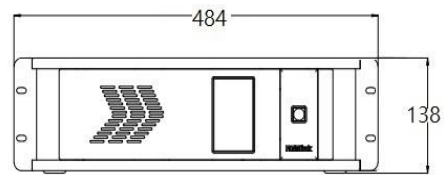

Order Codes

Product Code	Item
310-0003-10-0	X3
190-0003-01-0	Quad DVI Input Module
190-0003-02-0	Quad HDMI Input Module
190-0003-03-0	Quad VGA Input Module
190-0003-04-0	Quad 3G SDI (SCALE) Input Module
190-0003-06-0	Octuple CVBS Input Module
190-0003-07-0	Quad USB Input Module
190-0003-11-0	4K@30 Digital Input Module
190-0003-13-0	Quad H.264 Input Module
190-0003-15-0	4K@60 Digital Input Module
190-0003-17-0	12G SDI Input Module
190-0003-18-0	Quad HDBaseT Input Module

Product Code	Item
190-0003-21-0	Quad DVI Output Module
190-0003-22-0	Quad 2K HDMI Output Module
190-0003-24-0	Quad 3G SDI Output Module
190-0003-25-0	Quad HDBaseT Output Module
190-0003-28-0	ARO Rotation Module
190-0003-38-0	4K HDMI Output Module
950-0001-00-0	Power Supply 200W

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.



www.rgblink.com



Specifications are correct at time of printing and subject to change or alteration without notice.

Specification

Connectors	Input	<p>4 slots, up to 16 inputs</p> <p>Select from</p> <ul style="list-style-type: none"> 4K@60 Module 4K@30 Module 12G SDI Module 3G SDI Module HDMI Module DVI Module H.264 Module HDBaseT Module VGA Module CVBS Module USB Module 	<ul style="list-style-type: none"> 1 x DVI-I 2 x HDMI-A 1 x DisplayPort 2 x DVI-I 2x HDMI-A (1 In/1 Loop) 2x DisplayPort (1 In/1Loop) 4 x BNC (1 x 12G SDI input, or 4x3G SDI Input) 8 x BNC (4 In 4 Loop) 4 x HDMI-A 4 x DVI-I 4 x RJ 45 4 x RJ 45 4 x DB15 8 x BNC 4 x USB-A 	
	Output	<p>2slots, up to 8 outputs</p> <p>Select from</p> <ul style="list-style-type: none"> HDMI Module DVI Module HDBaseT Module 4K HDMI Module ARO Rotation Module 	<ul style="list-style-type: none"> 4 x HDMI-A 4 x DVI-I 4 x RJ 45 2 x HDMI-A 4 x DVI-I 	
	Communication	<ul style="list-style-type: none"> LAN RS 232 1 x USB Genlock/Sync 	<ul style="list-style-type: none"> 1 x RJ 45 1 x RJ 11 1 x USB-B 1 x BNC 1 x HDMI-A 	
	Power	2 slots	Up to 2 power Inputs	IEC
Performance	Input Resolutions	<p>SDI</p> <p>SMPTE 480i 576i 720p@23.98/24/25/29.97/30/50/59.94/60 1080i@59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 1080psf@23.8/24/25/29.7/30</p> <p>DVI HDMI</p> <p>SMPTE 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@239.98/24/25/29.97/30/50/59.94/60 1080psf@23.8/24/25/29.7/30</p> <p>VESA 800x600@60 1024x768@60 1280x768@60 1280x960@60 1280x1024@60 1360x768@60 1440x900@60 1400x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 2048x1080@60 2048x1152@60 2560x960@60</p> <p>HDBaseT</p> <p>SMPTE 720p@50/60 1080p@24/25/30/50/60</p> <p>VESA 800x600@60/75/85 1024x768@60/75/85 1280x768@60 1280x800@60 1280x1024@60/75/85 1360x768@60 1366x768@60 1400x900@60 1400x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1152@60 2560x812@60 2048x816@60</p> <p>CVBS</p> <p>SMPTE 480i 576i</p> <p>VGA</p> <p>VESA 800x600@60 1024x768@60 1280x960@60 1280x1024@60 1360x768@60 1400x1050@60 1440x900@60 1600x1200@60 1680x1050@60 1920x1080@60</p> <p>H.264</p> <p>176x144 240x180 320x180 320x240 320x256 352x228 352x480 400x224 400x320 480x270 480x272 480x320 480x360 480x480 544x480 608x448 640 x 360 640x480 704x576 720x404 720x480 720x540 1280x720 720x576 850x480 1024x576 1680x1056 1920x1080</p> <p>4K@30</p> <p>SMPTE 480p 576p 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@30</p> <p>VESA 800x600@60 1024x768@60 1280x800@60 1280x1024@60 1400x1050@60 1440x900@60 1600x1200@60 1680x1050@60 1920x1080@60 2048x1080@60 2048x1152@60 2560x1600@60 3840 x 2160@30</p> <p>4K@60</p> <p>SMPTE 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@50/59.94/60 2160p@30/60</p> <p>VESA 800x600@60 1024x768@60 1280x768@60 1280x800@60 1280x1024@60 1360x768@60 1366x768@60 1400x900@60 1600x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1080@60 2048x1152@60 2560x812@60 2560x960@60 2560x1600@60 3840x1080@60 3840x2160@30 3840x2160@60</p> <p>12G SDI</p> <p>SMPTE 720p@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@23.98/24/25/29.97/30/50/59.94/60</p>		
	Output Resolutions	<p>Select from below or configure customized</p> <p>SDI</p> <p>SMPTE 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 1080psf@23.8/24/25/29.7/30</p> <p>DVI HDMI</p> <p>SMPTE 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60</p> <p>VESA 800x600@60 1024x768@60 1280x800@60 1280x960@60 1280x1024@60 1360x768@60 1440x900@60 1400x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 2048x1152@60</p> <p>HDBaseT</p> <p>SMPTE 720p@50/59.94/60 1080i@50/59.94/60 1080p@239.98/24/25/29.97/30/50/59.94/60</p> <p>1024x768@60/75/85 1280x768@60 1280x800@60 1280x1024@60/75/85 1360x768@60 1366x768@60 1400x900@60 1400x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 1920x1080@60 2560x812@60 2048x816@60</p> <p>4K HDMI</p> <p>SMPTE 720p@25/30/50/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@23.98/24/25/29.97/30/50/60</p> <p>800x600@60 1024x768@60 1280x768@60 1280x800@60 1280x1024@60 1360x768@60 1366x768@60 1400x900@60 1600x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1152@60 2560x812@60 2560x816@60 2560x1600@60 3840x1080@60 3840x2160@60 4096x2160@60</p>		
	Supported Standard	<p>SDI SMPTE ST 2082-1, SMPTE ST 2081-1, SMPTE ST 424, SMPTE ST 292-1, SMPTE ST 259, DVB-ASI,MADI</p> <p>HDMI 2.0</p> <p>DP 1.2</p> <p>DVI Dual Link</p> <p>HDBaseT 1.0</p>		
	Grey Level	12 bit		
	Color Space	4:4:4		
	Power	Input Voltage	AC 100V-240V, 50/60Hz	
		Max Power	205W	
	Enviroment	Temperature	0°C ~ 55°C	
		Hudmidity	10%~90%	
	Physical	Weight	Net	12.3kg
Package			20.4kg	
Dimension		Net	485mmx387mmx135mm	
		Package	635mmx545mmx275mm	

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.



www.rgblink.com



Specifications are correct at time of printing and subject to change or alteration without notice.